L0830...08PP...

∅8mm, 行星齿轮系列 Planetary Gearbox Series

应用领域：医疗器械、安防设备、视像产品、高端智能电玩、个人保健产品等领域。
Applications: medical equipment, security systems and locks, audio and visual producks, personal healthcare products, and high-end hobby products.

电机参数 / Motor Data

				L0831-620-3.0 -08PP28-0017	L0830-92-3.5 -08PP152-0080
1	电压	Voltage	V	3.0	3.5
2	端电阻	Terminal resistance	Ω	1.75	8.5
3	空载转速	No-load speed	rpm	620	92
4	空载电流	No-load current	mA	150	50
5	最大转矩	Max torque	mNm	45	76
6	负载转矩	Load torque	mNm	10	10
7	负载转速	Load speed	rpm	480	82
8	负载电流	Load current	mA	560	100
9	减速比	Reduction ratio		1/28	1/152
10	重量	Weight	g	5.07	5.07
11	工作温度范围	Operating temperature range	°C	-10~+70	-10~+70

特性曲线 /Characteristics Curve

L0831-620-3.0-08PP28-0017

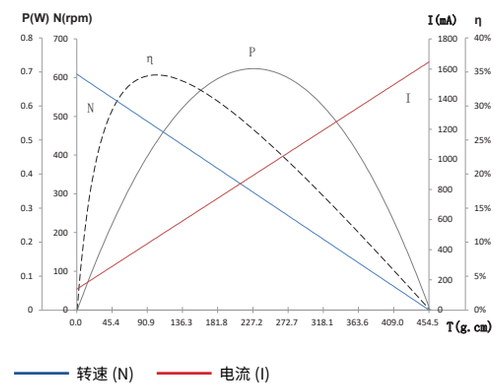

仅供参考，详细了解请以产品规格书为准。
For reference only, please refer to the product specification.

可选配置 / Options

性能 Special coils: 连续运行范围内可定制 customizable in continuous operation rang
法兰 Flange: 标准前后法兰 standard front and rear flanges / 定制法兰 custom flanges
电气连接 Electrical connection: 端子或导线 connector or wire / 导线长度 lead wires length

外观图 /Outline Drawing

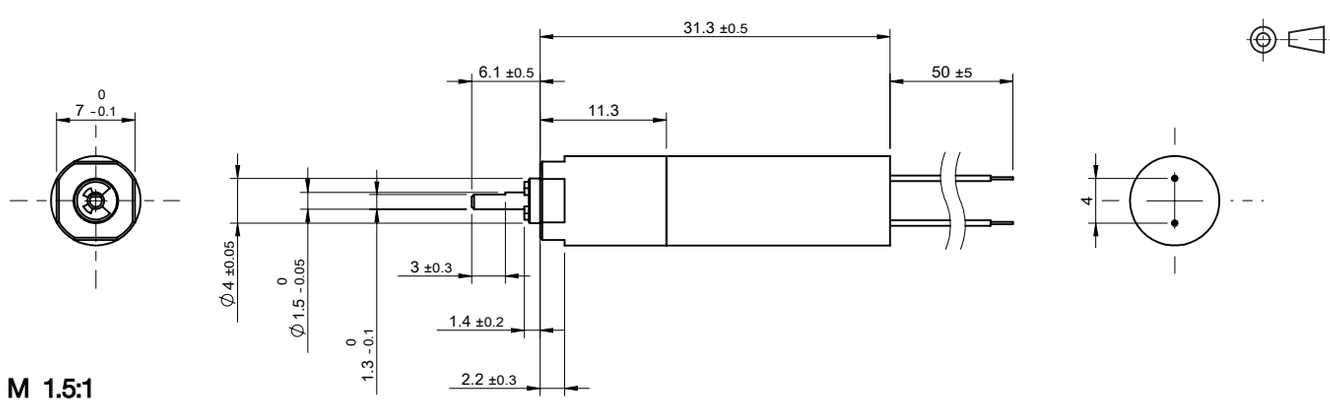

规格如有变更，恕不另行通知。Specification subject to change without notice.