

C1020...10PP... | C1019...10PRC...(2)


Ø 10mm, 行星齿轮系列 Planetary Gearbox Series

应用领域：医疗器械、安防设备、视像产品、高端智能电玩、个人保健产品等领域。

Applications: medical equipment, security systems and locks, audio and visual products, personal healthcare products, and high-end hobby products.

				C1020-110-2.5 -10PP171-0053	C1019-80-3.0 -10PRC171-0108	C1019-110-3.0 -10PRC171-0078
电机参数 / Motor Data						
1	电压	Voltage	V	2.5	3.0	3.0
2	端电阻	Terminal resistance	Ω	3.7	10.5	5.6
3	空载转速	No-load speed	rpm	110	80	115
4	空载电流	No-load current	mA	100	40	75
5	最大转矩	Max torque	mNm	37.2	25	38
6	负载转矩	Load torque	mNm	9.8	9.8	9.8
7	负载转速	Load speed	rpm	80	48	85
8	负载电流	Load current	mA	230	140	195
9	减速比	Reduction ratio		1/171	1/171	1/171
10	重量	Weight	g	3.8	3.8	3.8
11	工作温度范围	Operating temperature range	°C	-10~+70	-10~+70	-10~+70
特性曲线 / Characteristics Curve						

C1020-110-2.5-10PP171-0053

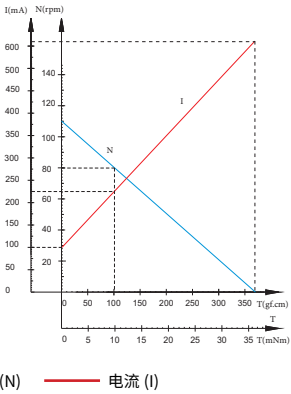

仅供参考，详细了解请以产品规格书为准。
For reference only, please refer to the product specification.

可选配置 / Options

性能 Special coils: 连续运行范围内可定制 customizable in continuous operation rang

法兰 Flange: 标准前后法兰 standard front and rear flanges / 定制法兰 custom flanges

电气连接 Electrical connection: 端子或导线 connector or wire / 导线长度 lead wires length

外观图 / Outline Drawing

